



WA 06-165/T-EN54V

- ballproof
- wall- and ceiling mounting
- BS 5839



EN 54-24:2008
Ref. Nr.: 007-13
ID-Code: SAA-LS07
1438/CPD/0231

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The 6W powered speaker is equipped with a 165mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability. For additional reliability, a 2 pin-ceramic block, a thermal fuse is provided and the speaker chassis is impregnated against wetness. Excellent qualified for the installation in sports facilities and schools.

The speaker is also secured with the high protection class IP 54 against the security risks of environmental influences.


The speaker is also compliant with the British Standard BS 5839, Part 8.

Quick and easy mounting with screws.

Polar Diagrams

Horizontal Isobars


Copyright by Four-Audio GmbH & Co KG Licensed to AAC

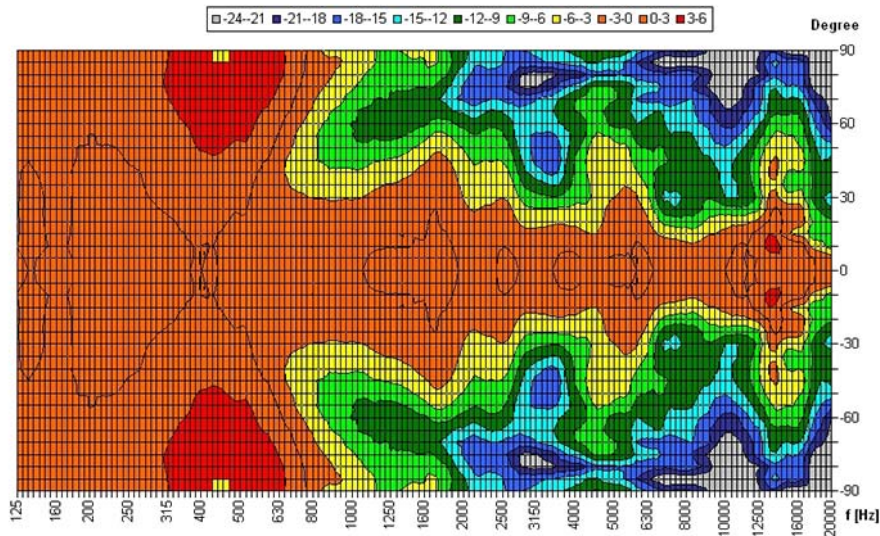

Parameters: Cyclic Move: 0° ; Symmetry: 0,+180 sym ; Freq.Smooth: 1/3 Oct ; Ang.Resol: 5° ; Rel. to: 0° Axis 0°


Vertical Isobars

Copyright by Four-Audio GmbH & Co KG Licensed to AAC

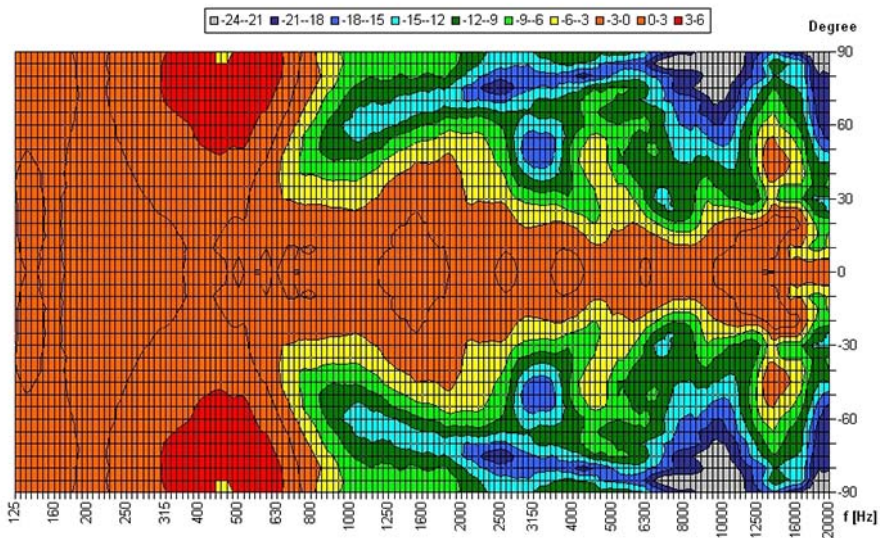


Parameters: Cyclic Move: 0° ; Symmetry: 0,+180 sym ; Freq.Smooth: 1/3 Oct ; Ang.Resol: 5° ; Rel. to: 0° Axis 0°

Frequency Response Diagrams

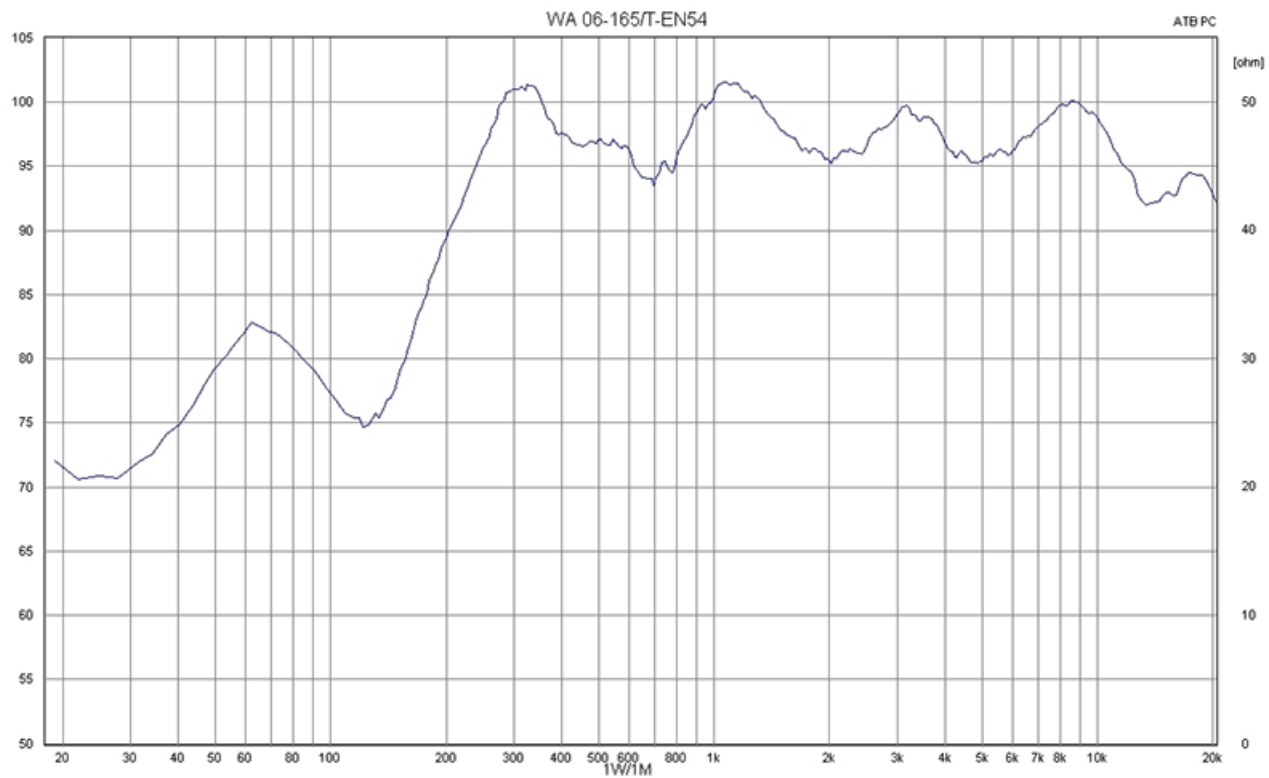

Technical Diagrams

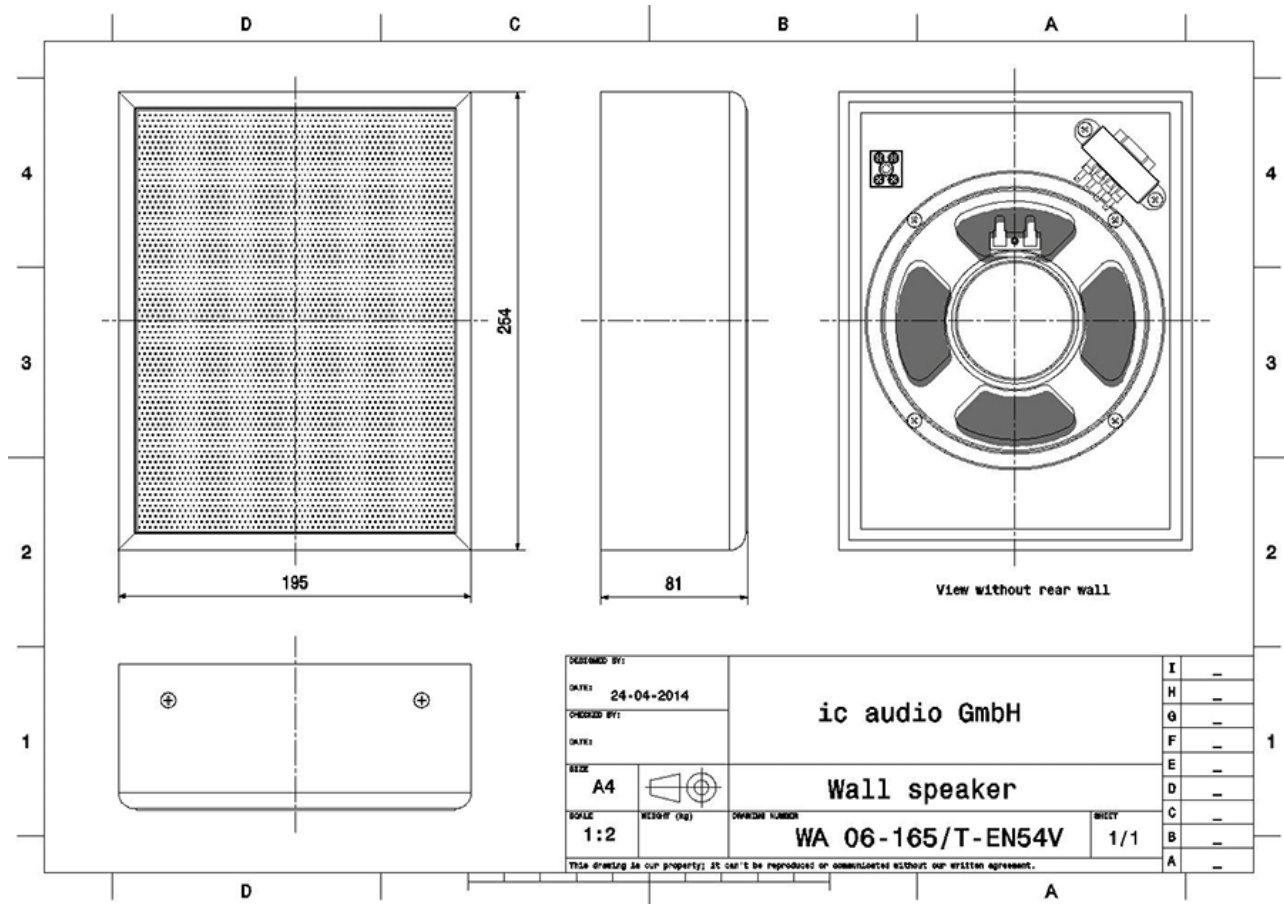

Technical Data (Electical)

Description	WA 06-165/T-EN54V
Power	6/3/1,5 W
Frequency Range	197 - 21.900 Hz
Frequency Response	175 - 23.500 Hz
SPL 1W/1m, IEC 268-5	100,6 dB
SPL , 1W/4m, IEC 268-5	88,6 dB
SPL Pmax/4m, IEC 268-5	96,3 dB
Sensitivity EN54-24, 1W/4m	79,5 dB
Dispersion -6dB, 500Hz	h=180° v=180°
Dispersion -6dB, 1KHz	h=83° v=74°
Dispersion -6dB, 2KHz	h=100° v=115°
Dispersion -6dB, 4KHz	h=55° v=53°

Technical Data (Mechanical)

Dimensions	252x192x82 mm
Weight (net)	1,99 kg
Temperature range	-20 / +80 °C
Mounting	screws
Connector	2-pin ceramic block
Maximum cable cross section	8mm ²
Max. cable cross section loop	2x2mm ²
Colour	white

Product Attributes



Measurements according to DIN IEC 268-5 | RoHS compliant (2002/95/EG)



Article Nr.: 20102197V

Packing Unit: 8

