

GM-3405

Also available as EV-Version



Features


- Ceiling speaker with firedome (fire rated)
- 6 W loudspeaker, transformer 100 V
- EV-Version with ceramic terminal and thermal fuse – no short circuit in case of fire!
- For background music and speech reproduction

Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	3/6 W
Nominal noise power 8 Ω	6 W
Nominal impedance 100 V	3330/1667 Ω
Sensitivity (1 W/1 m)	92 dB
Maximum SPL (6 W/1 m)	96 dB
Frequency range (-10 dB)	100–18'000 Hz
Coverage angle (-6 dB/1 kHz)	119° (h) x 119° (v)
Dimensions (Ø/Depth)	200/90 mm
Cutout	Ø 185 mm
Weight	0.9 kg
Color	White
Temperature range	-20° C to ~45° C
Protection	IP44
Measurement environment	Half-space free-field


Electrical connection

STANDARD

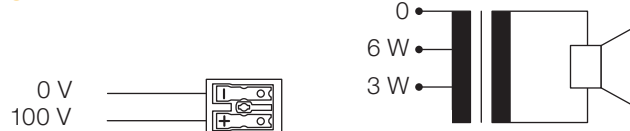

EV-VERSION

blue = 0 V | brown = 100 V

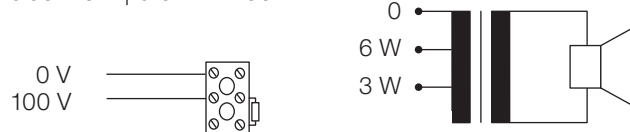

Certificates


EN 60268-5

Ordering information | Accessories


GM-3405	Loudspeaker with firedome (fire rated)
GM-3405-EV	Loudspeaker with firedome as EV-Version (fire rated)
Colors	NCS or RAL available on request

Dimensions and fitting (measuring in mm)


1

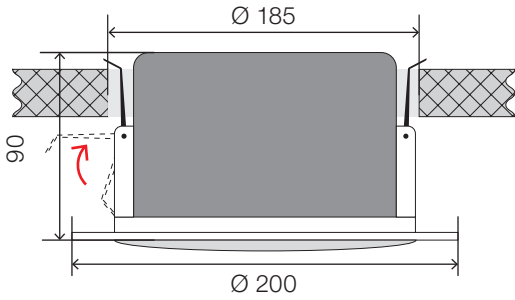


2

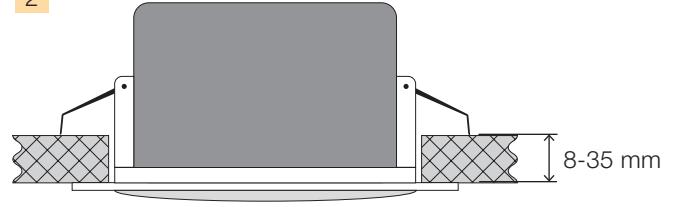


Frequency response | Polar plot

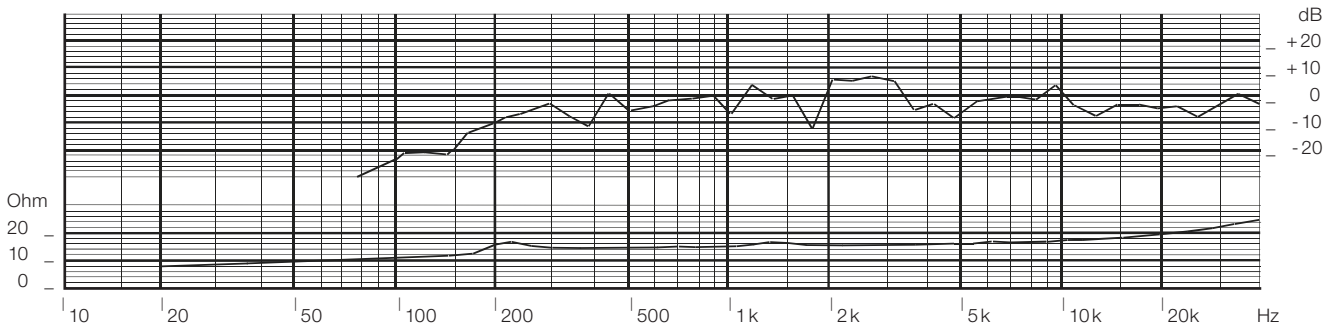

Horizontal

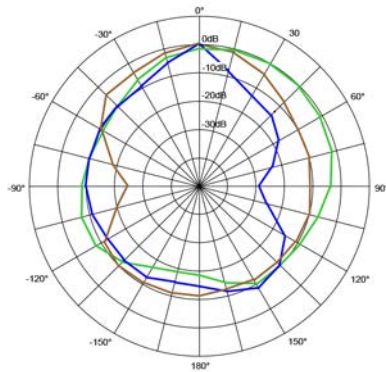

- 1 kHz
- 4 kHz
- 8 kHz

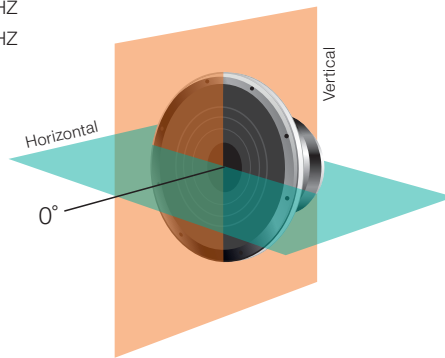

Vertical

