

Features

- 4" fireproof version ceiling speaker
- Built-in 100V & 70V transformer
- Ceramic connector, thermal use and fire-resistant cable
- 3W-6W at 100v output
- Metal enclosure, aluminum grille with fire dome
- Fast installation by spring clip
- Excellent response for background music and voice message
- EN54-24 certification is under taken
- Painted in white color

Description

The T-104C is a fireproof ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 4" full range high temperature resistant speaker driver is designed of wide frequency response 110-13kHz, the multiple power taps 3W & 6W are helpful for different applications varies from room size and ambient noise surroundings. The metal enclosure, aluminum grille with fire dom all are painted in attractive white color and a fire dome metal can is supplied. Its spring clamp makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where voice alarm system is needed.

Fireproof design features of this speaker include ceramic terminal, thermal fuse, metal back can and fire-resistant cable.


Specification

Model	T-104C
Power Taps @100V	3W, 6W
Power Taps @70V	1.5W, 3W
Impedance	Com/3.3KΩ/1.7KΩ
SPL(1W/1M)	89dB
Max. SPL (Rated W/1M)	97dB
Frequency Response (-10dB)	110-16KHz
Finish	Baffle, Grille: Steel, White Cover: Steel, Color Plating
Speaker Driver	4" x 1
Cutout Size	155mm
Dimensions	180 x 106mm
Weight	0.9Kg
Mounting	Spring-clip

Appearance:



Direction Diagram:

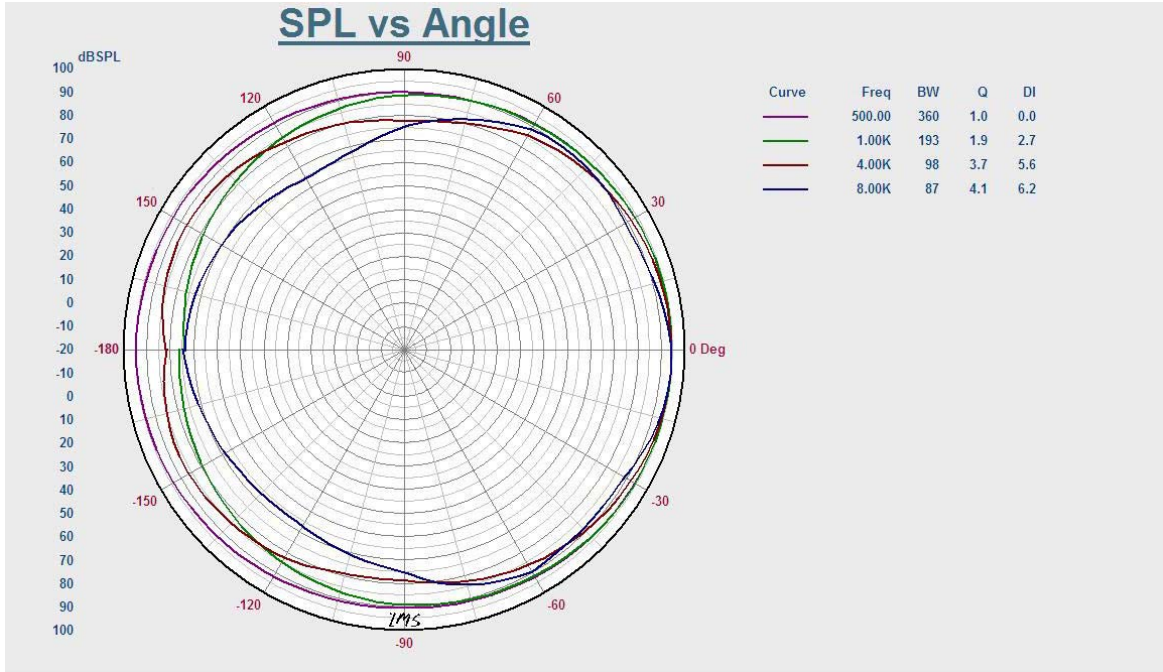

Frequency Response:

